


Delta Loop: Provides touch free matching from 6 through 80 meters and a power rating of 250W PEP SSB, 125W CW, and 25W Digital, which is most effective from 10.1 to 54.0 MHz (30-6M), while also providing short range Near-Vertical Incidence Skywave (NVIS) propagation on 3.5 to 7.0 MHz (80 - 40M).

Simply add the **MIL 2.0 Match** and **Delta Loop Adapter** from the 'Options' on this page to your cart to setup the HexTenna you already own as a Delta Loop.

* An external antenna tuner should be used if the antenna system is deployed over a poor ground or not placed in a clear area.

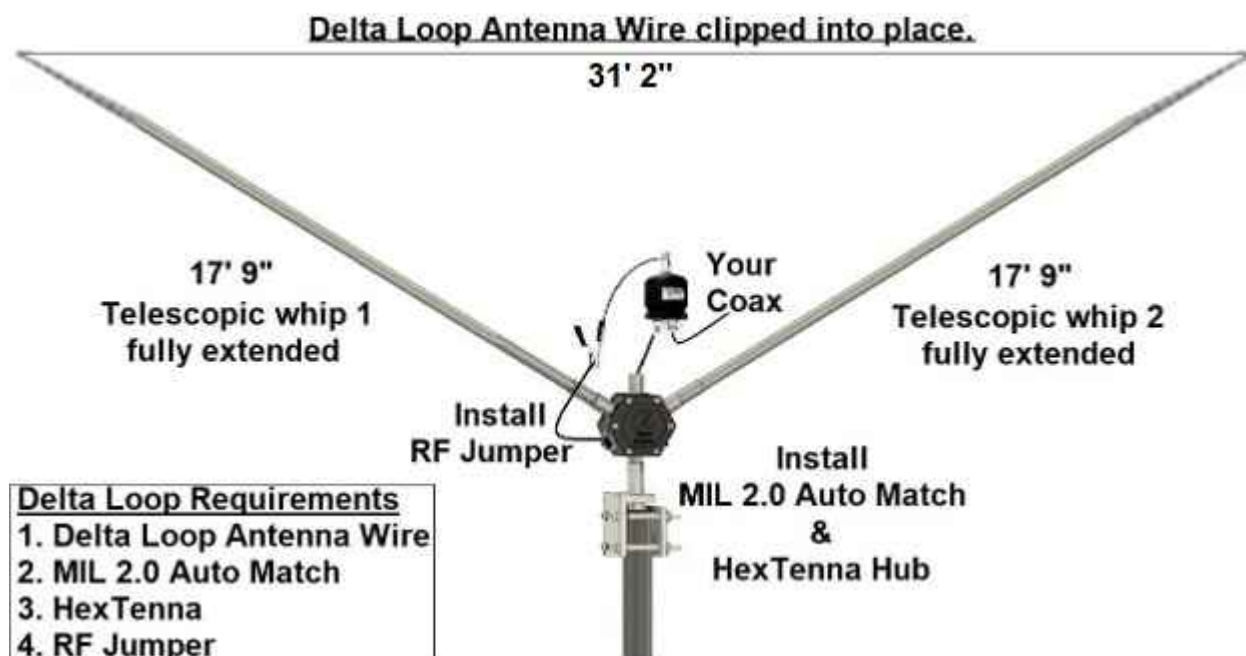

Included

1 - 31 ft. 2 in. 20 AWG Low Memory Silicone Rubber insulation over Stranded Tinned Copper Wire with Stainless Steel Clips